


ASSEMBLY INSTRUCTION
IRENA
(THREE SEATER SOFA)
ITEM CODE 81990/ 82035

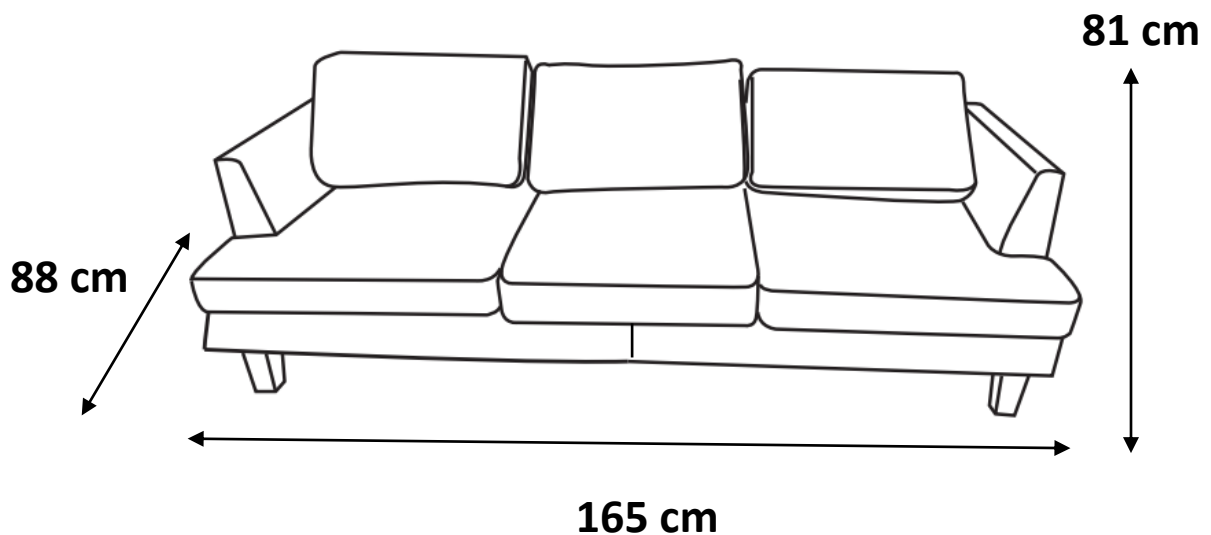


Imported by JWA Furniture Pty Ltd, Qld, Brisbane Australia.
For any assistance with assembly or for missing parts please refer to your receipt


PRE-ASSEMBLY PREPARATION

Before you start:





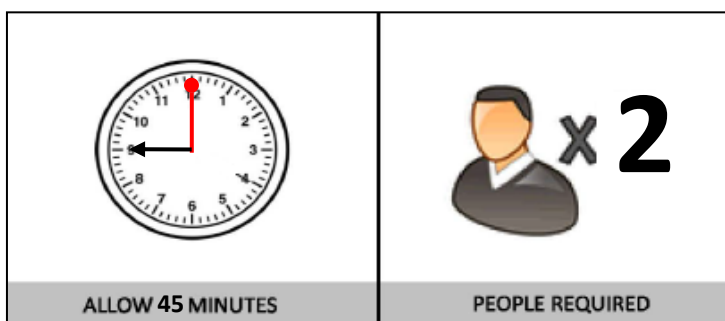




1. Choose a clean, level, spacious assembly area. Avoid hard surfaces that may damage the product
2. Take care when lifting. Product should be assembled as near as possible to the point of use
3. Ensure that you have all required contents for complete assembly
4. Always read the assembly instructions carefully before beginning assembly.
5. Keep all hardware parts and packaging out of reach of small children.
6. Do not over tighten the screws and bolts as this may damage the threads

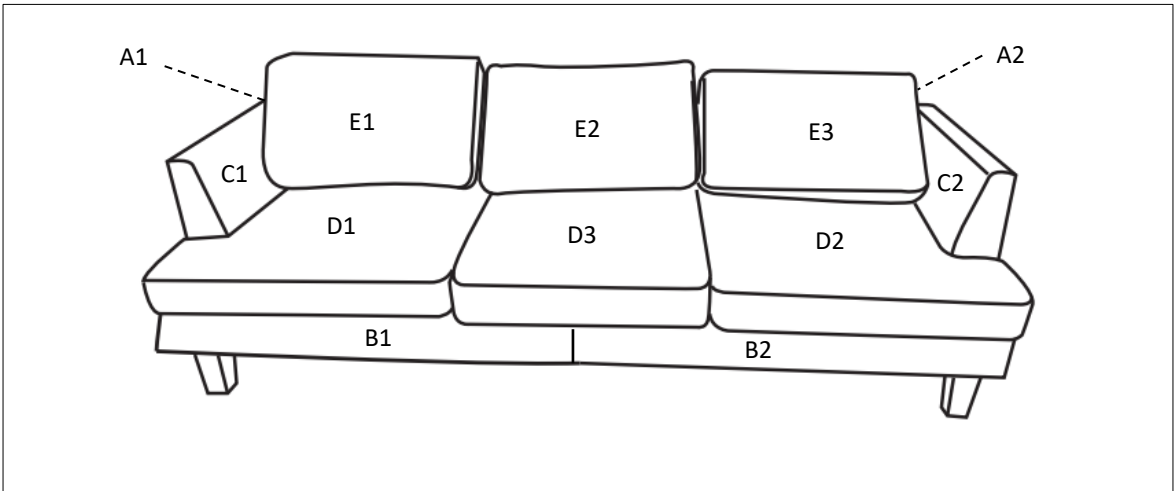


PARTS LIST




A	SOFA BACKREST (X2)
B	SEAT BASE (X2)
C	ARMREST (X2)
D	SEAT CUSHION (X3)
E	SOFA BACK CUSHION (X3)

1 M8 x 55 Screw (X7) 	2 M8 x 18 Cap (X7) 	3 METAL WASHER (X13) 
4 M6 x 30 Bolt (X2) 	5 M8 x 50 Bolt (X6) 	6 Plastic Washer (X4) 
7 Wood Leg (X4) 	8 Wood Center Leg (X1) 	9 Allen Key (X1) 


STEP 1: Insert the screws (1) into the left and right armrests (C1 /C2) 1cm ONLY by hand.

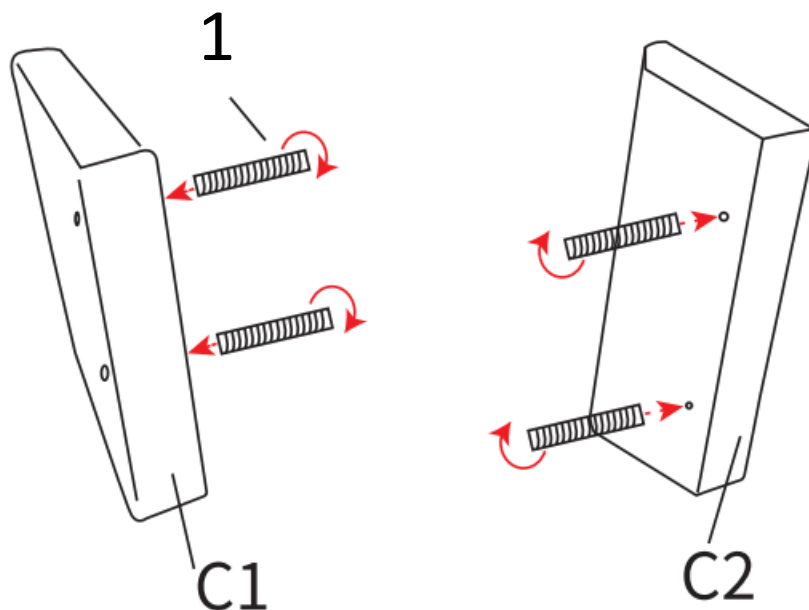


STEP 2: Gently insert the screw caps (2) by hand through the metal washers (3) and the sofa seat base (B1/B2), then tighten completely with the Allen key (9).

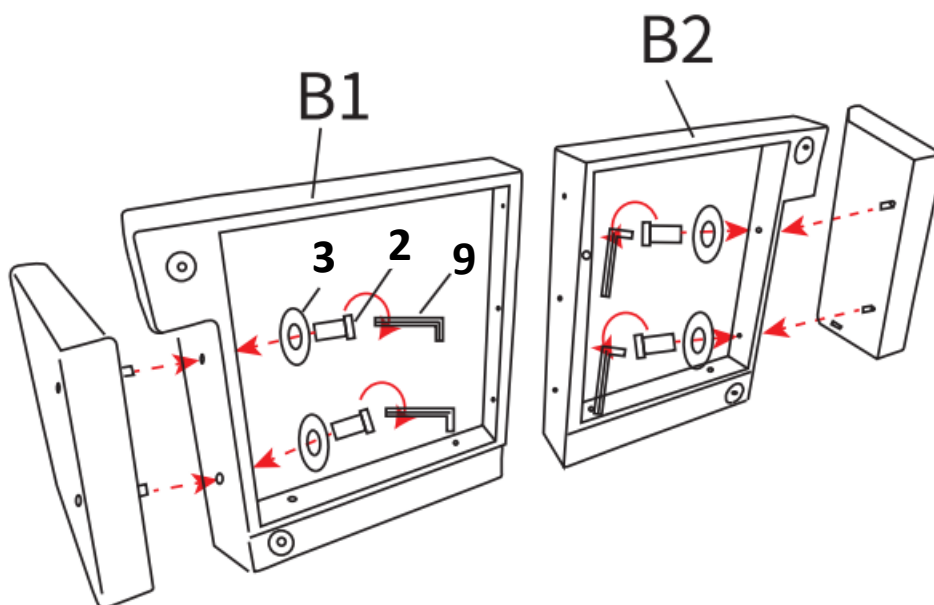


STEP 3: Insert the remaining screws (1) by hand into the left seat base (B1) 1cm ONLY.

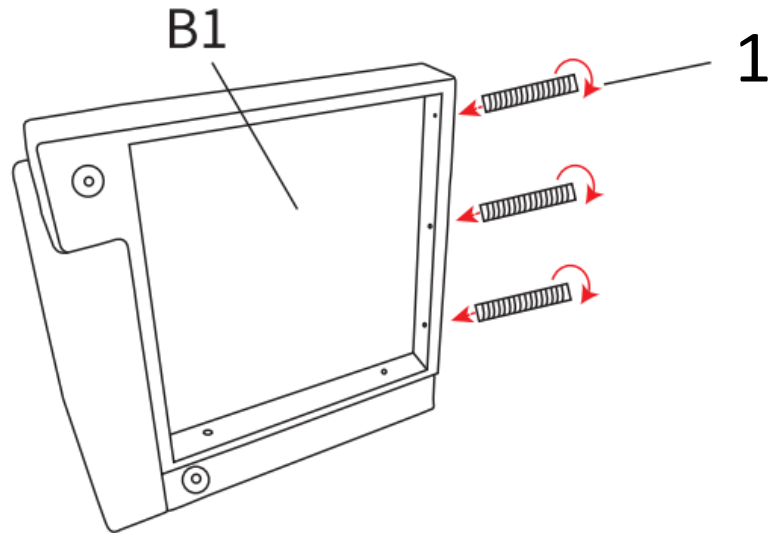


STEP 4: Gently insert the screw caps (2) by hand through the metal washers (3) and the sofa seat base (B1/B2), then tighten completely with the Allen key (9)

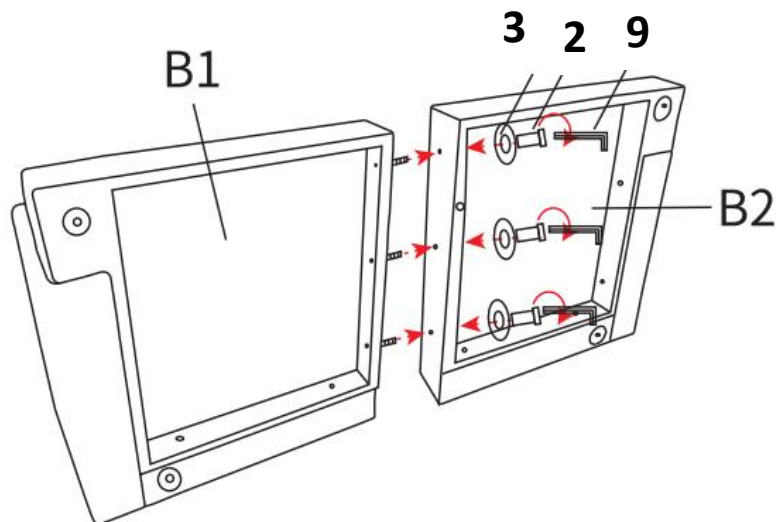


STEP 5: Align the connectors on the backrests (A1/A2). Push down and ensure back panels are flush.

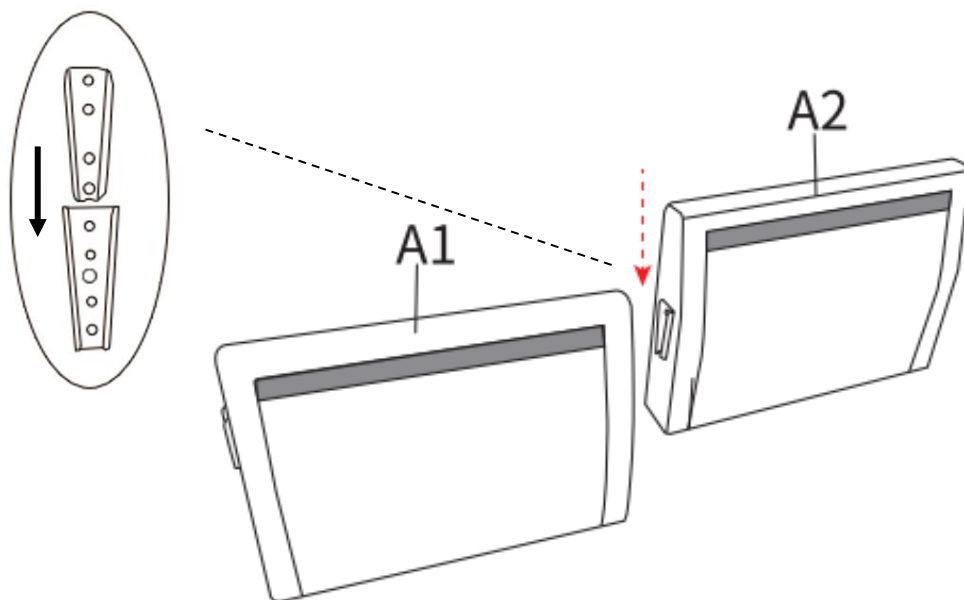


STEP 6: Align the connectors on the assembled backrest (A1/A2) with connectors on the armrests (C1/C2). Push down and ensure backrest and armrests are level.

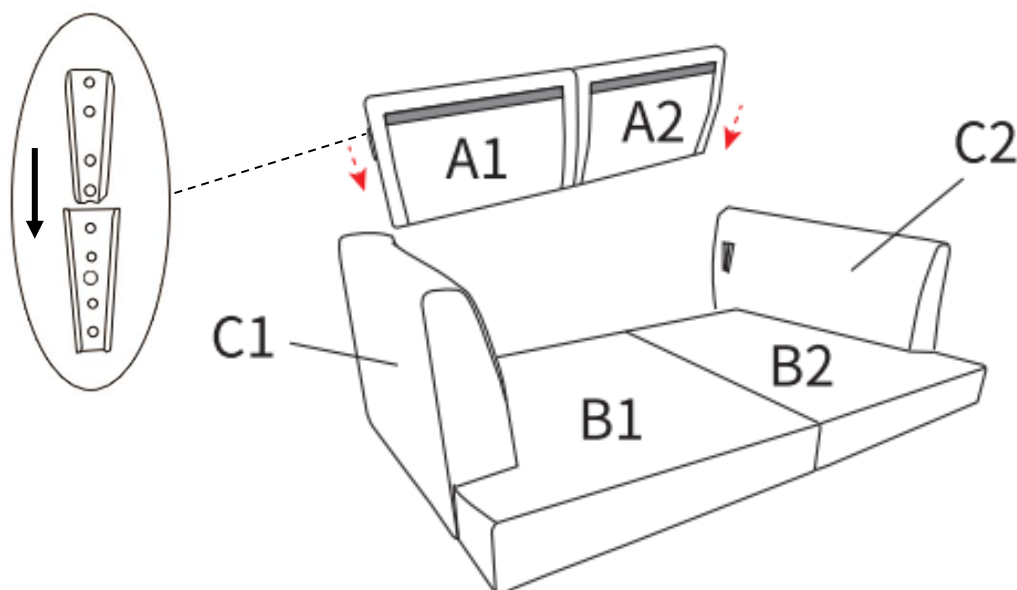


STEP 7: Pass the bolts (5) through the metal washers (3) and insert into screw hole connecting seat base (B1/B2) with backrest (A1/A2), tighten with Allen key (9).

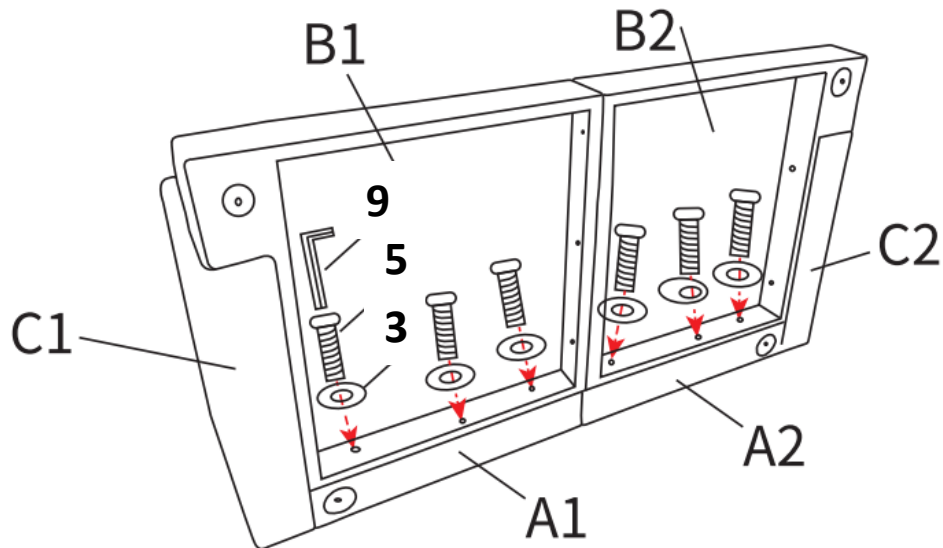


STEP 8: Thread plastic washer (6) through screw on wooden leg (7) and tighten clockwise. Attach wood center leg (8) with bolt (4), tighten with allen key (9)

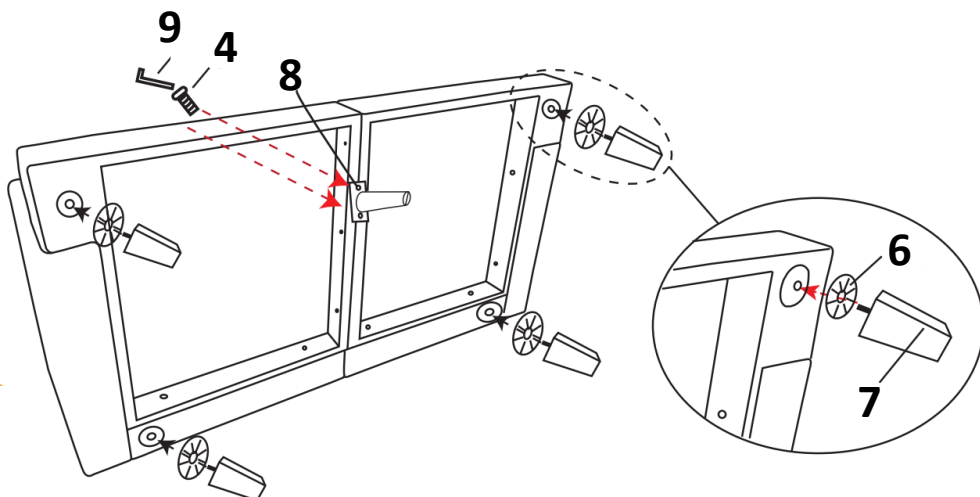

STEP 9: Remove back cushion (E1/E2/E3) and seat cushions (D1/D2/D3) from vacuum. Lightly fluff by hand and install making sure the Velcro strips align. Allow 24 hours for cushions to fully rebound and regain full volume.

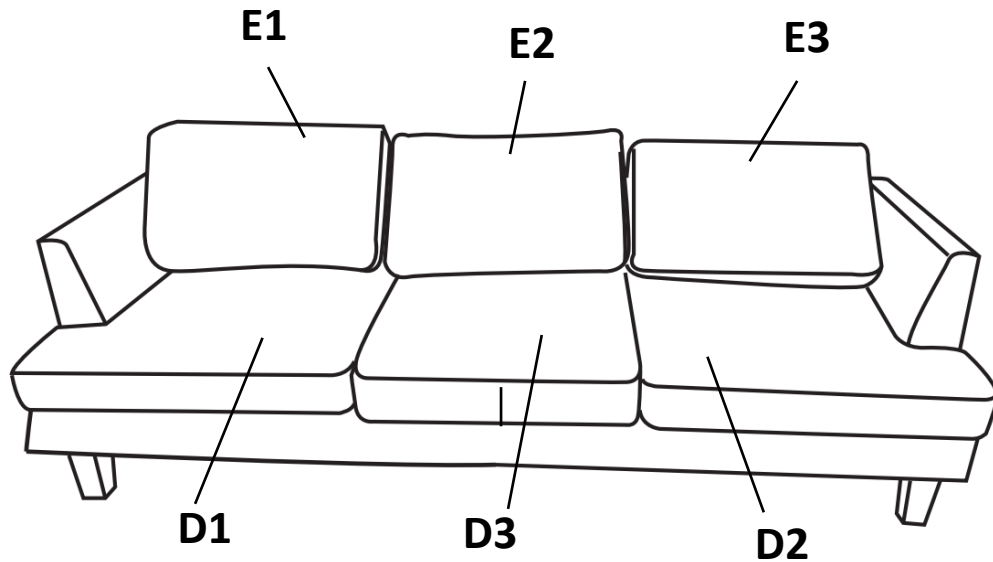

ASSEMBLY IS COMPLETE

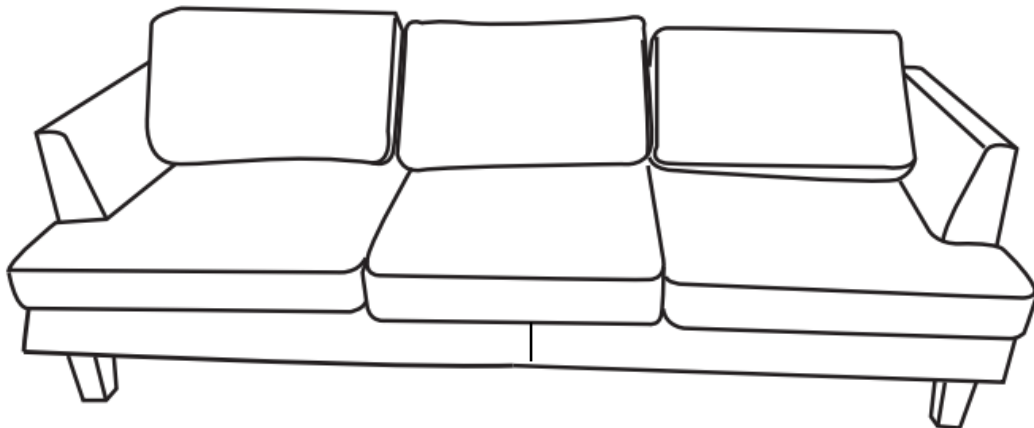

CAUTION:
ALWAYS LIFT YOUR SOFA WHEN MOVING/RELOCATING - DO NOT DRAG.
DRAGGING CAN CAUSE THE CENTRE SUPPORT LEGS TO BEND/BREAK

CARE AND MAINTENANCE

REGULAR CARE:

- Protect from direct sunlight
- Vacuum regularly using low suction
- Rotate reversible cushions regularly
- Avoid exposure to new clothing, cushions or throws as this may lead to dye transfer and permanent staining

CLEANING:

- Do not remove cushion covers for separate cleaning even though they may have zippers
- Do not wash, Do not dry clean, Do not shampoo clean
- Clean only with hot water extraction machine. Professional cleaning recommended
- Do not use dishwashing liquid or laundry detergent. Use only upholstery detergents
- Do not wet filling
- Dry in shade away from direct heat and sunlight
- Allow to dry thoroughly before re-use

SPOT CLEANING:

- Do not rub
- Do not spot clean with any solvent
- Treat spills and stains as soon as possible
- Gently scrape off any soil or blot any liquid from the surface of the fabric before applying cleaner
- Apply proprietary cleaning agents strictly according to instructions to remove the residue of the spill
- Do not saturate the fabric or interior with water or other cleaning liquids

WARNING:

Apply only water-based soil resist (fabric protection) treatments. Do not use aerosol products

- * PILLING IS NOT A FABRIC DEFECT OR FAULT AND IS NOT COVERED BY WARRANTY
- * PILLING IS A NORMAL OCCURRENCE CAUSED BY WEAR AND TEAR AND DOES NOT AFFECT THE DURABILITY OR FUNCTIONALITY OF THE FABRIC AND IS EASILY REMOVED