

JACKSON (TWO SEATER SOFA) ITEM CODE 81993/ 81996

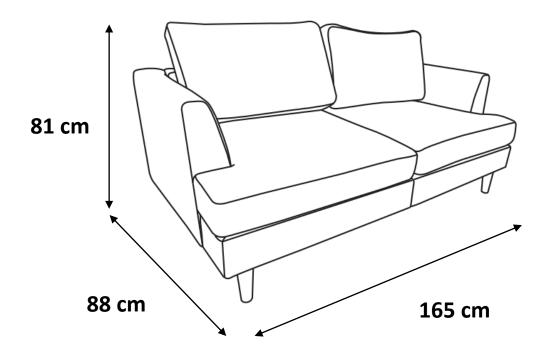



Imported by JWA Furniture Pty Ltd, Qld, Brisbane Australia. For any assistance with assembly or for missing parts please refer to your receipt


PRE-ASSEMBLY PREPARATION

Before you start:

- 1. Choose a clean, level, spacious assembly area. Avoid hard surfaces that may damage the product
- 2. Take care when lifting. Product should be assembled as near as possible to the point of use
- 3. Ensure that you have all required contents for complete assembly
- 4. Always read the assembly instructions carefully before beginning assembly.
- 5. Keep all hardware parts and packaging out of reach of small children.
- 6. Do not over tighten the screws and bolts as this may damage the threads




PARTS LIST




Α	SOFA BACKREST (X2)	
В	SEAT BASE (X2)	
С	ARMREST X2	
D	SEAT CUSHION X2	
Ε	SOFA BACK CUSHION X2	

1 M8 x 55 Screw (X7)	2 M8 x 18 Cap (X7)	3 METAL WASHER (X11)
4 M6 x 30 Bolt (X2)	5 M8 x 50 Bolt (X4)	6 Plastic Washer (X4)
7 Wood Leg (X4)	8 Wood Center Leg (X1)	9 Allen Key (X1)


STEP 1: Insert the screws (1) into the left and right armrests (C1 /C2) 1cm ONLY by hand.

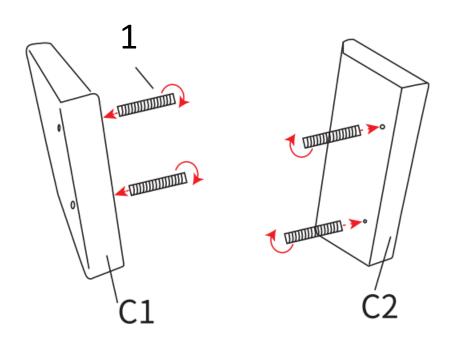


STEP 2: Gently insert the screw caps (2) by hand through the metal washers (3) and the sofa seat base (B1/B2), then tighten completely with the Allen key (9).

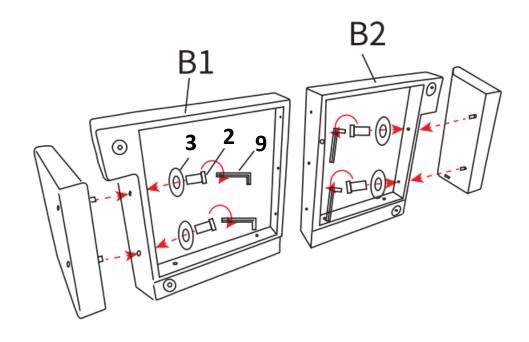


STEP 3: Insert the remaining screws (1) by hand into the left seat base (B1) 1cm ONLY.

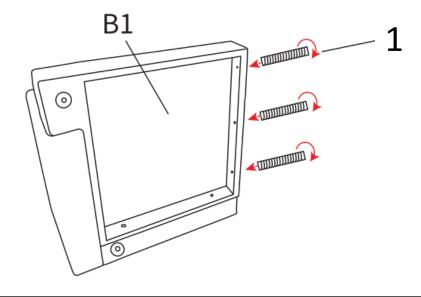


STEP 4: Gently insert the screw caps (2) by hand through the metal washers (3) and the sofa seat base (B1/B2), then tighten completely with the Allen key (9)

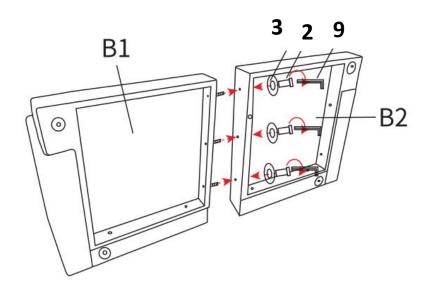


STEP 5: Align the connectors on the backrests (A1/A2). Push down and ensure back panels are flush.

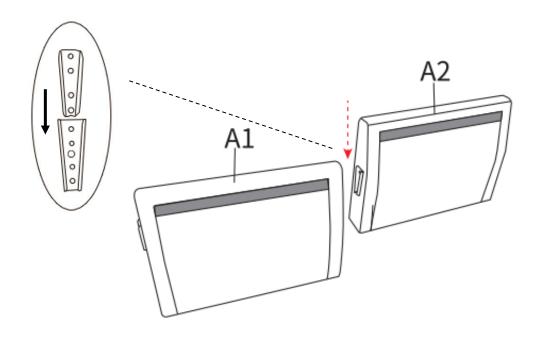


STEP 6: Align the connectors on the assembled backrest (A1/A2) with connectors on the armrests (C1/C2). Push down and ensure backrest and armrests are level.

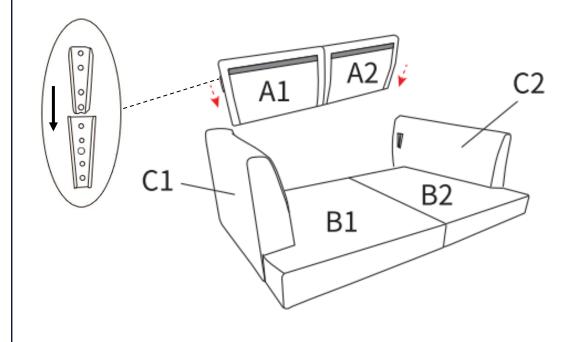


STEP 7: Pass the bolts (5) through the metal washers (3) and insert into screw hole connecting seatbase (B1/B2) with backrest (A1/A2), tighten with Allen key (9).

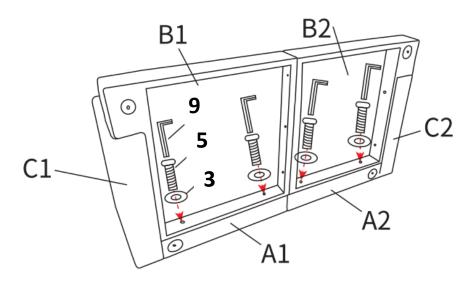


STEP 8: Thread plastic washer (6) through screw on wooden leg (7) and tighten clockwise. Attach wood center leg (8) with bolt (4), tighten with allen key (9)

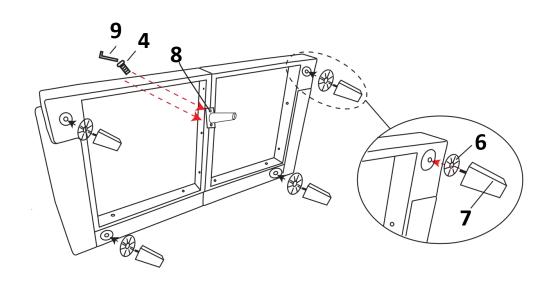

STEP 9: Remove back cushion (E1/E2) and seat cushions (D1/D2) from vacuum. Lightly fluff by hand and install making sure the Velcro strips align. Allow 24 hours for cushions to fully rebound and regain full volume.

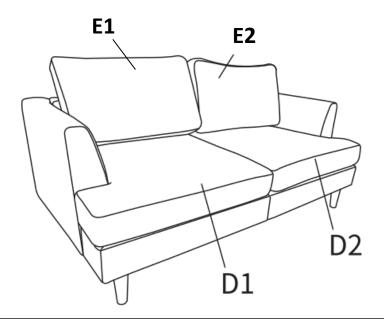

ASSEMBLY IS COMPLETE

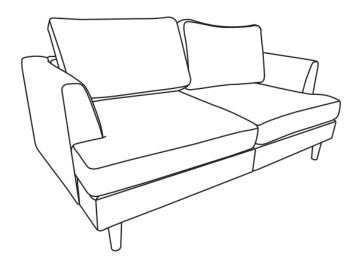

CAUTION:
ALWAYS LIFT YOUR SOFA WHEN MOVING/RELOCATING - DO NOT DRAG.
DRAGGING CAN CAUSE THE CENTRE SUPPORT LEGS TO BEND/BREAK

CARE AND MAINTENANCE

REGULAR CARE:

- Protect from direct sunlight
- Vacuum regularly using low suction
- Rotate reversible cushions regularly
- Avoid exposure to new clothing, cushions or throws as this may lead to dye transfer and permanent staining

CLEANING:

- Do not remove cushion covers for separate cleaning even though they may have zippers
- Do not wash, Do not dry clean, Do not shampoo clean
- Clean only with hot water extraction machine. Professional cleaning recommended
- Do not use dishwashing liquid or laundry detergent. Use only upholstery detergents
- Do not wet filling
- Dry in shade away from direct heat and sunlight
- Allow to dry thoroughly before re-use

SPOT CLEANING:

- Do not rub
- Do not spot clean with any solvent
- Treat spills and stains as soon as possible
- Gently scrape off any soil or blot any liquid from the surface of the fabric before applying cleaner
- Apply proprietary cleaning agents strictly according to instructions to remove the residue of the spill
- Do not saturate the fabric or interior with water or other cleaning liquids

WARNING:

Apply only water-based soil resist (fabric protection) treatments. Do not use aerosol products

- * PILLING IS NOT A FABRIC DEFECT OR FAULT AND IS NOT COVERED BY WARRANTY
- * PILLING IS A NORMAL OCCURRENCE CAUSED BY WEAR AND TEAR AND DOES NOT AFFECT THE DURABILITY OR FUNCTIONALITY OF THE FABRIC AND IS EASILY REMOVED